BRC SOLAR

New


BRClamp

Module frame mounting

Assembly aid for all BRC optimizers
Quick, secure mounting directly to the module frame – for a clean and efficient installation.

Maximum time savings
The optimizers are pre-mounted to the module on the ground. All that remains to be done on the roof is to connect the string cables – perfectly prepared.

More flexibility
You can choose whether to mount the optimizer with the BRClamp directly on the module frame or attach it to the mounting frame.

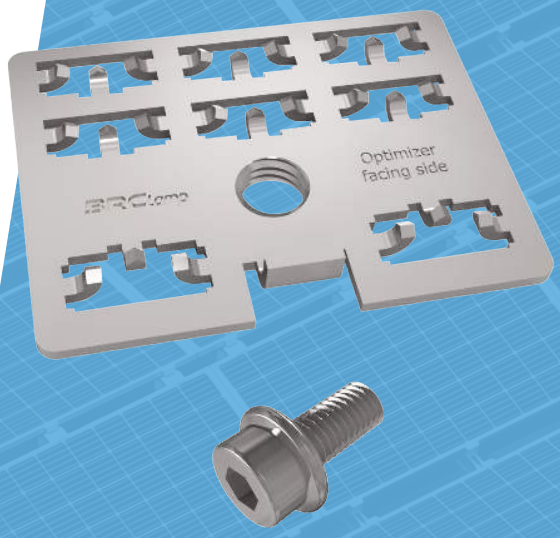

www.brc-solar.de


SIMPLE.
SMART.
OPTIMIZED.

TECHNICAL DATA

DATA	
Dimensions (W x L x H)	40 mm x 53 mm x 1,5 mm
Weight	33 g
Mounting	with supplied M8 screw
Material	stainless steel
Scope of delivery	BRClamp and M8 screw
Screw head	6 mm (internal hex socket)
Packaging unit	150 pieces per box (15 bags containing 10 pieces each)



Please ensure that the module is suitable for optimizer mounting with the BRClamp.
Observe the length of the BRClamp screw so that the rear of the module is not damaged.

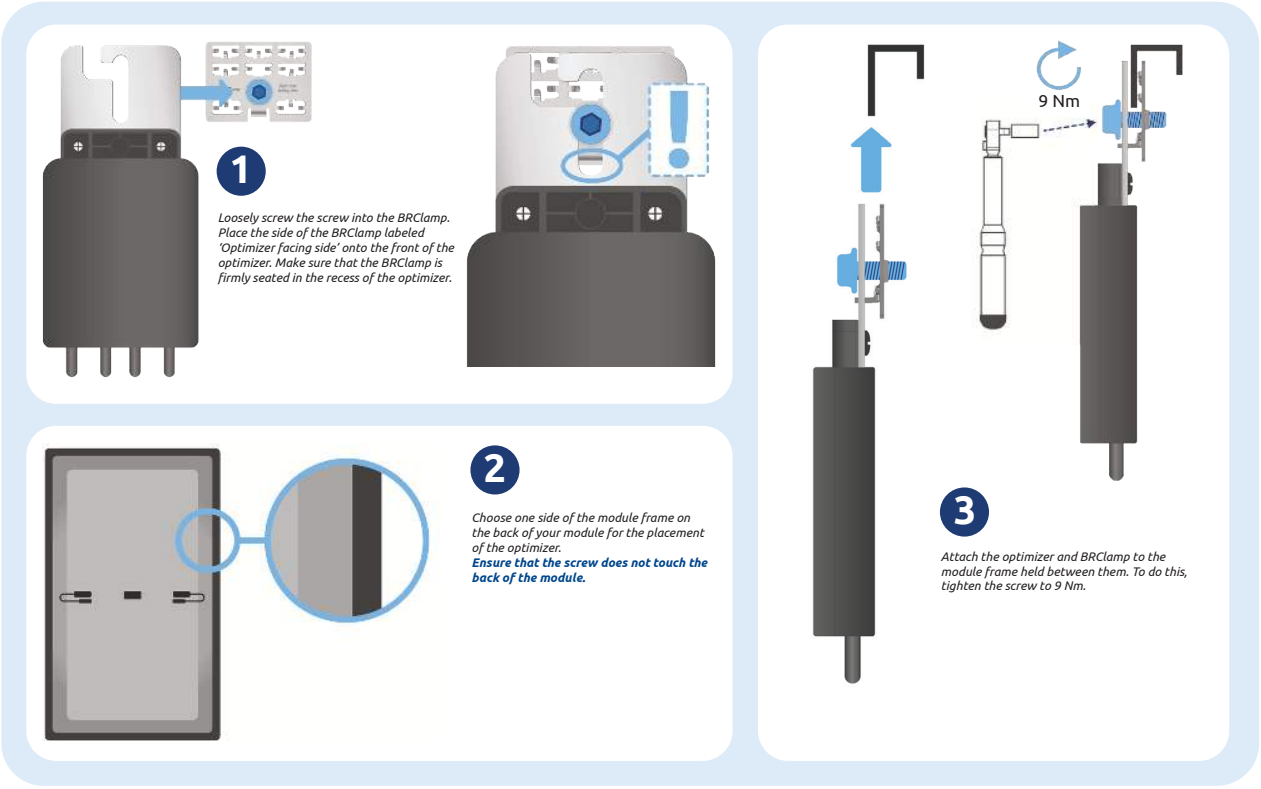

WARRANTY
Because of our Long-Life-Electronics we grant warranty for 25 years for all BRC-Optimizer

LONG-LIFE-ELECTRONICS
The Power Optimizer possesses a long-life circuit using the newest GaN technology

MAXIMUM YIELD
More PV-modules can be installed by using BRC Power Optimizers

RELIABLE SUPPORT
You can reach us for any concerns by e-mail and phone

BRC SOLAR