
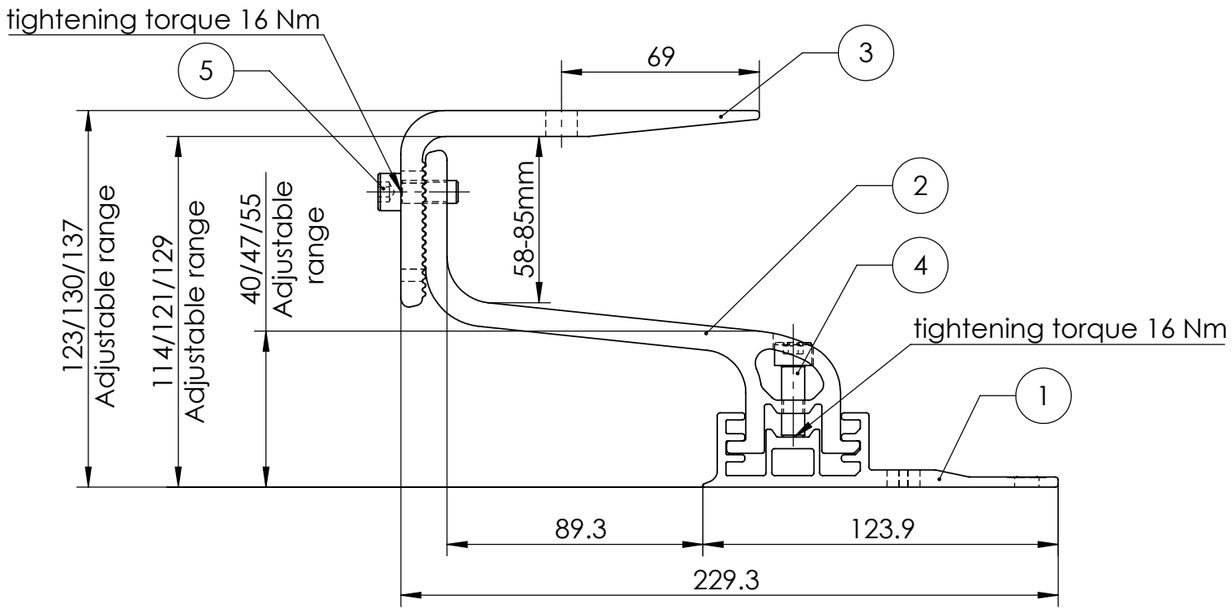
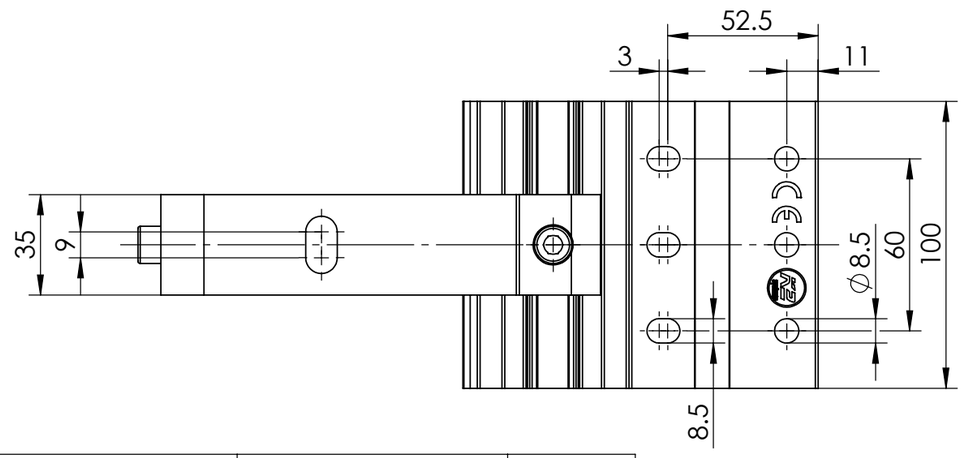



Isometric
(Delivery condition)
1 : 5



| Pos.No. | Designation | Material | Quantity |
|---|---|---|---|
| 1 | SingleHook 3S Baseplate light | EN AW 6063 T66 | 1 |
| 2 | SingleHook 4S Bracket | EN AW 6063 T66 | 1 |
| 3 | SolidHook 4S+ Angle | EN AW 6063 T66 | 1 |
| 4 | Socket head bolt - ISO 4762 - M8x35 | A2-70 | 1 |
| 5 | Socket head bolt serrated - similar ISO 4762 - M8x20<br>alternative: Socket head bolt - ISO 4762 - M8x20 with serrated washer type "S" | A2-70 | 2 |

K2 Systems GmbH
Haldenstr. 1
71272 Renningen
Germany
+49 7159 42059-0

Designation:
# Data sheet SolidHook 4S+

| | Name | Date | Material: | | Item no.: | Revision: | |
|---|---|---|---|---|---|---|---|
| Designed | M. Preiß | 05.07.2016 | - | | 2002402 | 06 | A3 |
| Approved | JMA | 17.07.2026 | Surface: - | | | | All dimensions in mm |
| Last change | ASO | 15.07.2026 | Weight: ca. 577.3 g /pc | Scale: 1:2 | | | Sheet 1 of 1 |

This drawing is the sole property of K2 Systems GmbH. It is protected by copyright and may only be copied, reproduced or distributed to a third party with explicit permission!