/ Perfect Welding / Solar Energy / Perfect Charging

SHIFTING THE LIMITS

FRONIUS SENSOR CARD / BOX

/ Measuring additional values



/ With the Fronius Sensor Card / Box, up to six sensors for measuring insolation, ambient temperature, module temperature, wind speed, etc. can be integrated into the Fronius DATCOM system. Using the insolation and module temperature data, you are able to check your PV system and quickly identify anomalies in the system output to keep performance at a consistently high level. You can choose between a box and a card.

OVERVIEW OF THE MEASURING SIGNAL INPUTS

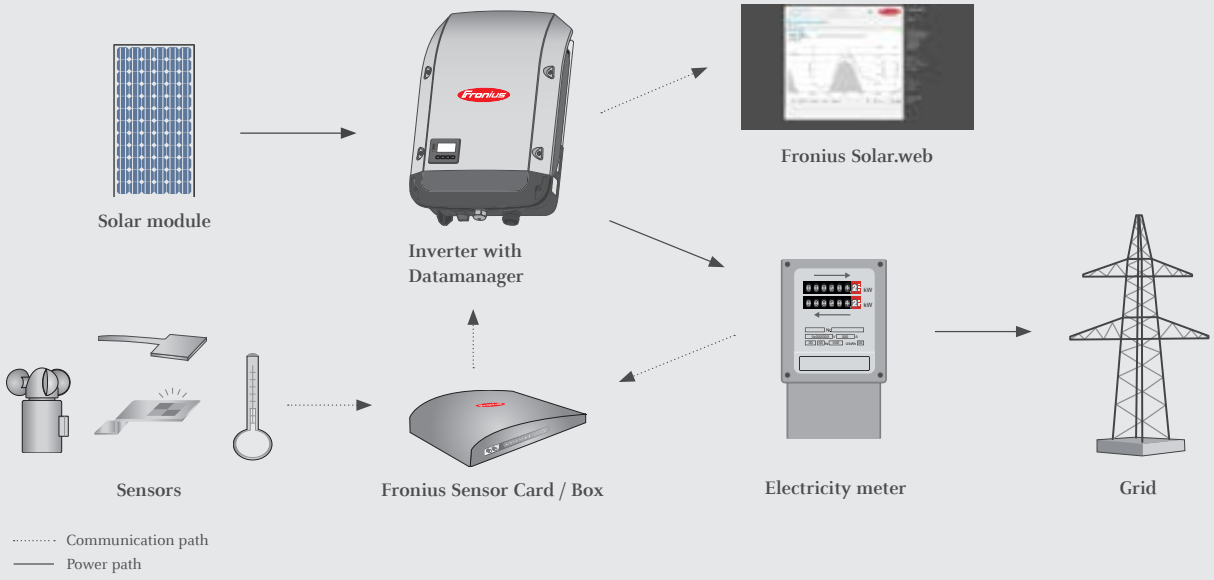

The Fronius Sensor Card / Box offers inputs for up to six measuring signals.
/ Two analogue inputs for two temperature sensors
/ One analogue input for evaluating a voltage signal (e.g. an insolation sensor)
/ Two digital inputs, e.g. for an energy meter and a wind speed sensor
/ One analogue input for evaluating a current signal (0 to 20 mA, 4 to 20 mA)

In addition to the Fronius Sensor Card / Box, a Fronius Datamanager is required for evaluating the data. This is either fitted as standard in the inverter or can be easily retrofitted.

FRONIUS SENSOR CARD / BOX TECHNICAL DATA

TECHNICAL DATA				
Supply voltage	12 V DC	Degree of protection (Box)	IP 20	
Energy consumption		Interfaces (Fronius Sensor Box only)	Socket:	Designation:
– Fronius Sensor Card	1.1 W	– RS422 (Fronius Solar Net)	RJ45	»IN«
– Fronius Sensor Box	1.3 W	– RS422 (Fronius Solar Net)	RJ45	»OUT«
T1, T2 channels		**D1, D2 channels**		
– Sensors	PT1000	– Max. voltage level	5.5 V	
– Measuring range	–25 – +75°C	– Max. frequency	2,500 Hz	
– Accuracy	0.5°C	– Min. pulse duration	250 µs	
– Resolution	1°C	– Operating point »OFF« (»LOW«)	0 - 0.5 V	
		– Operating point »ON« (»HIGH«)	3 - 5.5 V	
Insolation channel		**Current input channel**		
– Measuring ranges	0 - 100 mV 0 - 200 mV 0 - 1 V	– Measuring ranges	0 - 20 mA 4 - 20 mA	
– Accuracy	3% from meter reading	– Accuracy	5% from meter reading	
Dimensions (length x width x height)		**Dimensions (length x width x height)**		
– Fronius Sensor Card	140 x 100 x 26 mm	– Fronius Sensor Box	197 x 110 x 57 mm	

FRONIUS SENSORS

Fronius provides ready-made sensors for measuring insolation, ambient temperature, module temperature and wind speed. These, combined with the Fronius Sensor Card / Box and Fronius Solar.web, allow for a target/actual comparison of the system output. Up to six sensors can be connected to each Fronius Sensor Card / Box and integrated into the Fronius DATCOM system.



FRONIUS INSOLATION SENSOR
/ For measuring the radiated energy.



FRONIUS MODULE TEMPERATURE SENSOR
/ For measuring the module temperature.



FRONIUS AMBIENT TEMPERATURE SENSOR
/ For measuring the ambient temperature.



FRONIUS WIND SPEED SENSOR
/ For measuring the wind speed.

/ Perfect Welding / Solar Energy / Perfect Charging



WE HAVE THREE DIVISIONS AND ONE PASSION: SHIFTING THE LIMITS OF POSSIBILITY.

/ Whether welding technology, photovoltaics or battery charging technology – our goal is clearly defined: to be the innovation leader. With around 3,000 employees worldwide, we shift the limits of what's possible - our record of over 1,000 granted patents is testimony to this. While others progress step by step, we innovate in leaps and bounds. Just as we've always done. The responsible use of our resources forms the basis of our corporate policy.

Further information about all Fronius products and our global sales partners and representatives can be found at **www.fronius.com**

v03 Jul 2014 EN

Text and images correspond to the current state of technology at the time of printing. Subject to modifications.
All information is without guarantee in spite of careful editing, liability excluded. Copyright © 2011 Fronius™. All rights reserved.

Fronius India Private Limited
GAT no 312, Nanekarwadi
Chakan, Taluka - Khed District
Pune 410501
India
pv-sales-india@fronius.com
www.fronius.in

Fronius Australia Pty Ltd.
90-92 Lambeck Drive
Tullamarine VIC 3043
Australia
pv-sales-australia@fronius.com
www.fronius.com.au

Fronius UK Limited
Maidstone Road, Kingston
Milton Keynes, MK10 0BD
United Kingdom
pv-sales-uk@fronius.com
www.fronius.co.uk

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
pv-sales@fronius.com
www.fronius.com

EN v01 Jun 2014 as17